

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
3 June 2004 (03.06.2004)

PCT

(10) International Publication Number
WO 2004/045951 A1

(51) International Patent Classification⁷: **B65B 25/00**,
25/16, 31/02

(21) International Application Number:
PCT/EP2003/012838

(22) International Filing Date:
17 November 2003 (17.11.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
MI2002A 002461 19 November 2002 (19.11.2002) IT
MI2003A 000033 10 January 2003 (10.01.2003) IT

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **ILAPAK MACHINE AUTOMATICHE S.A.** [CH/CH]; P.O. Box 756, CH-6916 Grancia-Lugano (CH).

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **LEVY, Roger, S.** [CH/CH]; Via Pocobelli 27, CH-6815 Melide (CH).


(74) Agent: **FARAGGIANA, Vittorio**; Ingg. Guzzi & Ravizza S.r.l., Via Vincenzo Monti, 8, I-20123 Milano (IT).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PLANT AND DEVICE FOR THE CONTINUOUS PACKING OF FOOD PRODUCTS IN MODIFIED ATMOSPHERE

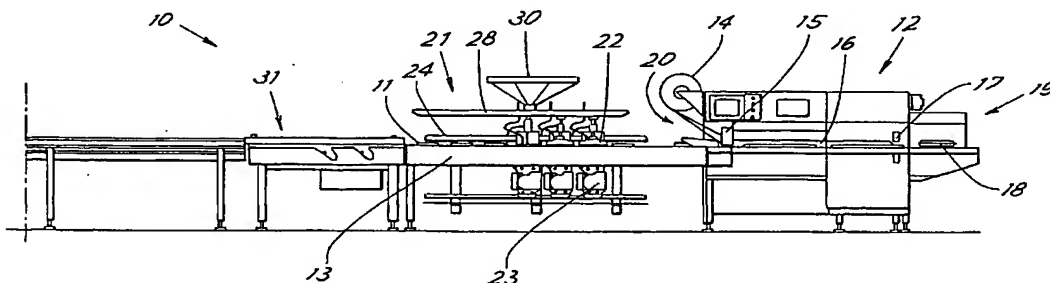

(57) Abstract: A plant (10) for the continuous packing of food products in modified atmosphere (11), comprises a machine (12) for continuous packing of food products in modified atmosphere and conveyor (13) for the continuous sequential feeding of food products to the machine. A device (21) is present at the entrance of the machine (12) that temporarily submits a product fed by the conveyor (13) to vacuum and to a modified atmosphere before being packed in modified atmosphere in the machine.

WO 2004/045951 A1

"PLANT AND DEVICE FOR THE CONTINUOUS PACKING OF FOOD PRODUCTS IN MODIFIED ATMOSPHERE"

The present invention herein refers to an innovative plant
5 for the continuous packing of food products in modified atmosphere. The invention also refers to a device for submitting the products to vacuum and to a modified atmosphere before packing.

In the packing technique of perishable products, vacuum
10 packing and packing in modified atmosphere are well known. In the first case, the complete removal of air from inside the pack ensures long life of the product. On the other hand, it is well known that the appearance of the food packed, which is considerably squashed by the sides of the
15 vacuum packet, is not at all appealing.

In the case of packing in modified atmosphere, the air
inside the pack is replaced with suitable inert gases. As the sides of the pack must not closely adhere to the product, as is the case of the vacuum pack, the appearance
20 of the packed product remains basically natural and is therefore more appealing to purchase. For many food products packing in modified atmosphere is therefore preferred. In particular, packing in modified atmosphere is preferred for bakery products, which by their nature do not
25 support the compression of vacuum packing very well and for which the appearance is particularly important when purchasing.

A first type of plant for making packs in modified atmosphere comprises a packing chamber which is sealed

after the product (or a series of products) to be packed is placed inside, so that the chamber can be filled with gas and a pack is formed and sealed around the product incorporating said gas. Such machines offer a reduced
5 productive speed because the packing is made discontinuously, having to interrupt the feeding of new products for the whole time needed to carry out a complete packing cycle of the products put into the chamber.

However, such machines are often believed to be preferable
10 for packing "spongy" food products that retain air inside them. In fact, the chamber can be brought to vacuum before the gas is inserted, so as to remove the air that otherwise would remain trapped in the product and would reduce the preservation life. By spongy food products we intend here
15 food products that are permeable to gases and that have a relatively porous mass that can withhold air or other gases inside. Examples of such products are bakery products such as bread, cakes, pizzas and similar products.

Should the productive speed be preferred to the life of the
20 product, continuous machines can be used, in which a conveyor belt sequentially and continuously feeds the products to be packed. The products enter a tunnel packing area where a continuous plastic film strip is folded and sealed in a tubular shape to surround the products in
25 transit from the side while jets of gas are put into the tube. Transversal sealing heads then close segments of the tube to isolate each product. Machines made in this manner can continuously reach very high operative speeds. On the other hand, because of the continuity of the passage of the

products in the machine, it is not possible to make a packing area that seals off, which is capable of applying vacuum before the gas is inserted. On the contrary, the packing area, always open towards the outside at the two
5 ends, must be kept in overpressure with the gas to prevent other air from entering which would remain inevitably trapped in the packs.

The operative speed is therefore to the detriment of the preservation life of the packed product, a life that is
10 rather reduced (even more than 50%) compared to what can be obtained with discontinuous machines fitted with packing chamber.

The main aim of the present invention is to avoid the inconveniences mentioned above by providing a plant for
15 packing in modified atmosphere with continuous operation through which a preservation life that is comparable to the much slower discontinuous machines is obtained.

In view of this aim, the intention is to produce, according to the invention, a plant for the continuous packing of
20 food products in modified atmosphere, comprising a machine for continuous packing in modified atmosphere of food products and a conveyor for continuous sequential feeding of food products to the machine, characterized in that at the entrance of the machine means are present that
25 temporarily submit a product fed by the conveyor to vacuum before it is packed in modified atmosphere in the machine. Again according to the principles of the invention it was planned to make a device for temporarily submitting food products that flow sequentially on a continuous conveyor in

sequence to vacuum and to a modified atmosphere, comprising at least a bell connected to means for sucking air from inside it and to means for the input of modified atmosphere into it, the bell being held by movement means for its
5 synchronous movement along a transport section of the conveyor for enclosing in said section a product under it and submitting it to said vacuum and to said modified atmosphere.

To make the explanation of the innovative principles of the
10 present invention clearer as well as its advantages compared to the known technique, a description of a possible example of embodiment applying such principles follows, with the help of enclosed drawings. In the drawings:

- 15 - Figure 1 represents a side elevation of a schematic view of a plant according to the invention;
- Figure 2 represents a plan view of the plant of Figure 1;
- Figure 3 represents a side elevation of a schematic view, partially cutaway of a vacuum device of the plant of
20 Figure 1.

With reference to the Figures, Figure 1 shows a plant, indicated generically with 10, for the continuous packing of spongy food products in modified atmosphere. For example, said products (indicated generically with 11 in
25 the Figures) can be bakery products such as cakes, pizzas or similar products.

Plant 10 comprises a machine 12 for continuous packing in modified atmosphere of food products and a conveyor 13 that feeds the products to the machine continuously and

sequentially.

The continuous packing machine 12 is a type that in itself is known and therefore will not be shown here or described in detail, as an expert technician can easily imagine it.

5 For example, the machine comprises advantageously a roll 14 of plastic film for making the packs. The film is unwound at the entry 20 of the packing machine to obtain, thanks to known guides and suitable welders 15, a tubular shape 16 inside which the products that transit in the machine are
10 enclosed. The machine also comprises means (not shown) for sending suitable preservation gas into the tube formed by the film. Once the gas has been sent into the tube, transversal sealing means 17 close the packs (indicated generically with 18) that then leave the machine in 19.

15 Means 21 are present at the entrance of the machine 12 which form a device for temporarily submitting the products 11 fed continuously by conveyor 13 to vacuum before being packed in a modified atmosphere. It has been surprising to find that it is not necessary for the product to be held in
20 vacuum or in modified atmosphere until the packing is completed (as for example happens in the discontinuous machines already mentioned). It has been found in fact that the "emptying" of the air inside the product and its replacement with modified atmosphere is maintained for some
25 time even bringing the product into contact with the outside atmosphere at normal pressure. To further reduce the entrance of air in the product until the modified atmosphere enters the packing machine, means 21 also make a device, which after the vacuum sends in modified atmosphere

for "filling" the product.

It has been found that all this enables the product to be transferred to the area with gas in overpressure present inside the continuous packing machine.

- 5 Advantageously, the means that temporarily submit a product to vacuum and to modified atmosphere before entering the packing area of the machine, comprise at least a bell 22 connected to means 23 for the suction of air from inside it and the following input of modified atmosphere.
- 10 The bell 22 is supported by motorized movement means 24 for its synchronous movement along a transport section 25 of the conveyor that is near the entrance of the packing machine. The movement means enable a product to be enclosed under the bell in said section 25 so that it can be
- 15 submitted to vacuum, the bell acting as a seal on a transport surface of the conveyor. The suction means are chosen so as to have sufficient power to extract a sufficient quantity of air and in the short time required for the particular type of product that needs to be packed.
- 20 After having obtained the required vacuum, the means 23 input the gas chosen to create the modified atmosphere. The product under the bell thus absorbs the gas.

Advantageously, several bells are foreseen to act simultaneously on several products positioned sequentially

25 along said transport section, so as to have greater suction time available.

The number of bells and their reciprocal distance will be such that the pitch of the bells along section 25 is equal to the pitch of the products in said section, so that each

product is met by a bell from the beginning of the section 25 up to the end of said section. For simplicity, in the drawings only some bells are shown.

Upstream of section 25 known means 31 can be provided for
5 correct spacing and the correct phasing of products in relation to the carousel of bells.

As can be seen very well also in Figure 2 and, in greater detail, in Figure 3, the movement means with which the vacuum device 21 is equipped comprise a carousel 24 that
10 carries the bells along a closed section that comprises the transport section 25 of the conveyor. The movement means also comprise means for the controlled lowering of the bell on the conveyor along section 25.

As can be seen well in Figure 3, the lowering means are
15 advantageously made by means of a support 26 that holds the bell on the carousel and which slides vertically against the action of a spring 27 holding the bell in a raised position. Along the section 25 there are actuating means that push the bell towards the conveyor against the action
20 of the spring. In the simplest form, the actuator means are represented by a yoke 28 that acts on a little wheel 29 placed at the upper end of the support 26.

The suction and gas input means, in the form of suitable pumps, valves and gas sources, can be supported on the same
25 movement carousel as the bells, so that they can be substantially stationary with the bells. Provision can be made for a pump and a gas source for each bell, as can be seen in Figure 1, advantageously supported in the corresponding lower part of the carousel. A known rotating

distributor 30 distributes electricity to the pumps that move in the carousel.

The bell, its suction and gas input means and the movement support of the bell thus form a modular unit, repeated for each bell to be used.

As can be seen schematically in Figure 3 (for simplicity only one bell 22 is shown in the Figure), each bell 22 can advantageously correspond to a counter-bell 22b on the other face of the transport surface of the belt of the conveyor 13 so as to keep the pressure on the two sides of the belt balanced, to avoid stretching and deformation of the belt itself. Each counter-bell can be made with a mobile suction group similar to that of the bell 22 (or share with it parts of its mobile suction group) and be transported as well by the carousel 24 or by a similar carousel. If necessary because of a particular lower structure of the conveyor, the counter-bells can be brought closer and further away from the belt with a system that can be similar to that already described for the bells.

The return branch of the belt will be held sufficiently low to enable the passage of the counter-bells.

The movements of the bells and of the counter-bells will be synchronized so that when a bell lowers onto the belt to create the required vacuum around a product, the corresponding counter-bell creates a corresponding vacuum on the other face of the belt.

At this point it is clear as to how the preset aims are achieved. Each product that arrives at the plant, is submitted, without stopping it, to vacuum that sucks the

air from inside it, then it is moved into a continuous packing machine that packs it in modified atmosphere. The product can also be permeated with gas to reduce to minimum levels the return of air into it before packing. It has
5 been found that with a plant and a device according to the invention, the packing speed remains that of the continuous packing machines (for example more than 100 products per minute) with a preservation life of the packed product which basically equals that obtainable with the slow
10 discontinuous closed chamber packing machines with vacuum. Thanks to the movement of the bell along a product transport section it is possible to submit a product to a vacuum and to the input of gas for a relatively high time even if the product is moving at high speed. To obtain
15 longer vacuum and gas input times it is sufficient to conveniently lengthen the section 25 of the plant, without any need to reduce the feeding speed of the products. Naturally, the description made above of an embodiment applying the innovative principles of the present invention
20 is given as an example of said innovative principles and therefore must not be taken as limitative of the patent right sphere herein claimed. For example, the bell will be conformed with chamber suitable for the particular shape of the products treated, advantageously to minimize the extra
25 space in it when it encloses the product, so as to reduce the volume of air to be sucked out and to accelerate the formation of the required vacuum.

CLAIMS

1. Plant (10) for the continuous packing of food products (11) in modified atmosphere, comprising a machine (12) for
5 continuous packing in modified atmosphere of food products and a conveyor (13) for continuous sequential feeding of food products to the machine, characterized in that at the entrance of the machine (12) means (21) are present that temporarily submit a product fed by the conveyor (13) to
10 vacuum before it is packed in modified atmosphere in the machine.

2. Plant according to claim 1, characterized in that said means (21) comprise at least a bell (22) connected to means (23) for the suction of air from inside it and for the input
15 of modified atmosphere, the bell being supported by movement means (24, 26) for its synchronous movement along a transport section of the conveyor near the entrance of the packing machine to enclose in said section a product under it and submit it to said vacuum and to said modified atmosphere.

20 3. Plant according to claim 2, characterized in that the movement means comprise a carousel (24) transporting the bell (22) along a closed section that comprises said transport section of the conveyor and means (26, 28, 29) of controlled lowering of the bell onto the conveyor.

25 4. Plant according to claim 1, characterized in that the controlled lowering means comprise a support (26) of the bell that can be vertically lowered against the action of the elastic means (27) keeping the bell in a raised position and actuator means (28, 29) positioned along said

transport section to push the bell towards the conveyor against the action of said elastic means.

5 5. Plant according to claim 4, characterized in that the actuator means comprise a lowering cam yoke (28) of said support of the bell.

6. Plant according to claim 2, characterized in that it comprises a plurality of bells (22) to act simultaneously on several products moved sequentially along said transport section.

10 7. Plant according to claim 2, characterized in that the suction and input means (23) are supported by the carousel (24) to be moved together with the bell.

8. Plant according to claim 1, characterized in that the continuous packing machine (12) in modified atmosphere is
15 the type comprising a roll of plastic film (14) and means that unroll, conform into a tube and weld the film to create packs sequentially around products fed to it.

9. Device for temporarily submitting in sequence food products that flow sequentially on a continuous conveyor
20 (13) to vacuum and to a modified atmosphere, comprising at least a bell (22) connected to means (23) for the suction of air from inside it and means for the input of modified atmosphere into it, the bell being supported by movement means (24, 26) for its synchronous movement along a
25 transport section of the conveyor to enclose a product under it in said section and submit it to said vacuum and to said modified atmosphere.

10. Device according to claim 9, characterized in that the movement means comprise a carousel (24) for transporting

the bell along a closed section that comprises said transport section of the conveyor and means (26, 28) for controlled lowering of the bell onto the conveyor.

11. Device according to claim 9, characterized in that the
5 controlled lowering means comprise a support (26) of the bell that can be lowered vertically against the action of the elastic means (27) for keeping the bell in a raised position and actuator means (28) placed along said transport section to push the bell towards the conveyor
10 against the action of said elastic means.

12. Device according to claim 11, characterized in that the actuator means comprise a cam yoke (28) for lowering said support of the bell.



13. Device according to claim 9, characterized in that it
15 comprises a plurality of bells to act simultaneously on several products moved sequentially along said transport section.

14. Device according to claim 10, characterized in that the suction and input means (23) are supported by the carousel
20 to be moved together with the bell.

15. Device according to claim 14, characterized in that the suction and input means comprise a pump (23) for each bell.

16. Device according to claim 2, characterized in that it
25 comprises counter-bells (22b) connected to means for suction of air from inside them and which are mobile, to be positioned in front of the bells (22) and in contact with the other face of the transport surface of the conveyor, in the sense that vacuum is created that balances the action of vacuum of the bells (22) on the conveyor.

1/2

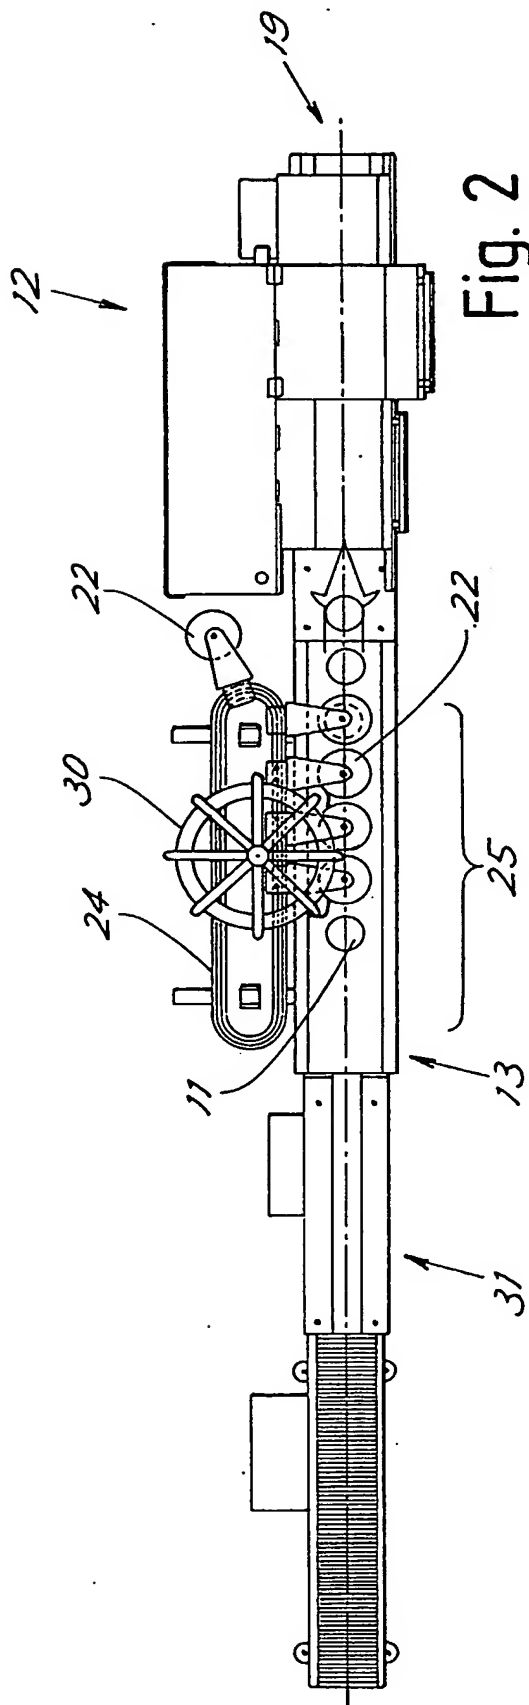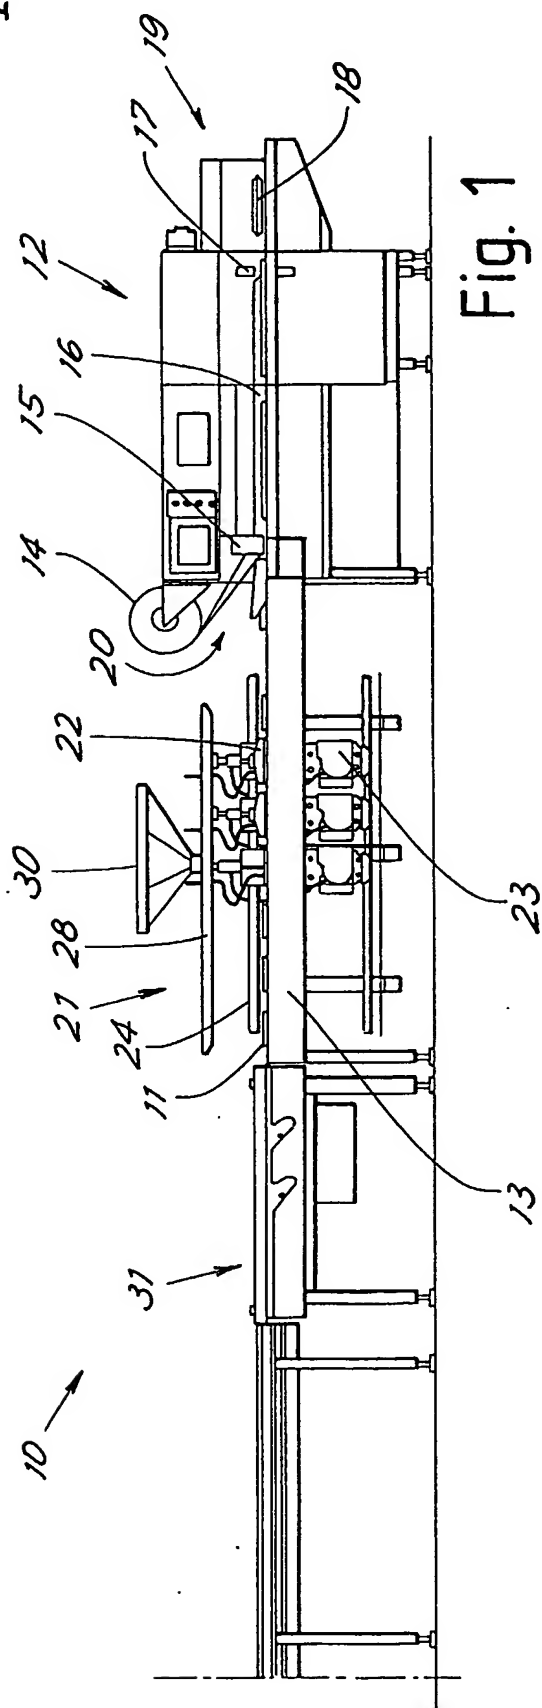

2/2

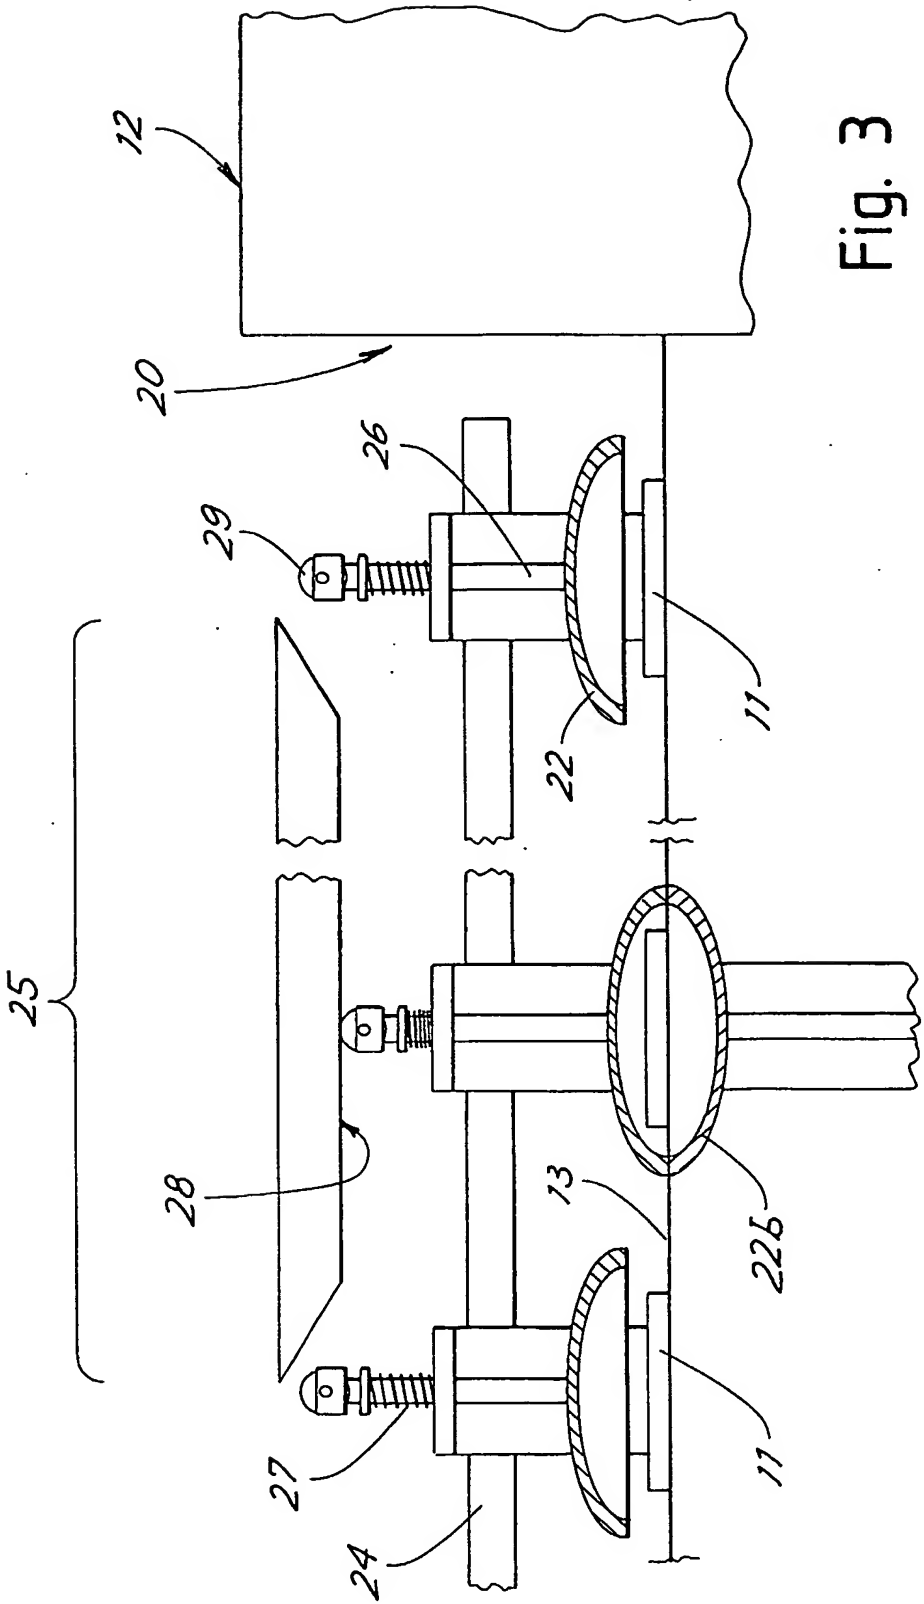


Fig. 3

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/EP 03/12838

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 B65B25/00 B65B25/16 B65B31/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 B65B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 2 005 980 A (JOULIN G) 2 May 1979 (1979-05-02) page 2, line 77 - line 101; figure 1 ---	1,8
X	GB 1 568 220 A (JOULIN G) 29 May 1980 (1980-05-29) the whole document ---	1,8
A	FR 1 337 932 A (MAYER & CO INC O) 20 September 1963 (1963-09-20) the whole document ---	2,6,7,9, 13,14
A	EP 0 368 116 A (VALLE SPLUGA SPA) 16 May 1990 (1990-05-16) the whole document ---	1-14
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

14 April 2004

Date of mailing of the international search report

21/04/2004

Name and mailing address of the ISA
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3016

Authorized officer

Vigilante, M

INTERNATIONAL SEARCH REPORT

International Application No.
PCT/EP 03/12838

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3 659 393 A (RICHTER JOSEPH) 2 May 1972 (1972-05-02) the whole document ---	1-14
A	FR 2 815 013 A (METRAS SA) 12 April 2002 (2002-04-12) the whole document ---	1-14
P,A	EP 1 279 600 A (CRYOVAC INC) 29 January 2003 (2003-01-29) the whole document ---	1-14
A	US 3 545 175 A (LILLUND NILS A) 8 December 1970 (1970-12-08) the whole document -----	2,9

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/12838

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
GB 2005980	A	02-05-1979	FR 2406392 A1	18-05-1979
			AU 525988 B2	09-12-1982
			AU 4065078 A	17-04-1980
			BE 871229 A1	01-02-1979
			CA 1117814 A1	09-02-1982
			CH 635482 A5	15-04-1983
			DE 2819752 A1	26-04-1979
			ES 474819 A1	01-04-1979
			IT 1099418 B	18-09-1985
			JP 54101454 A	10-08-1979
			LU 80357 A1	29-10-1979
			NL 7810546 A	24-04-1979
			ZA 7805874 A	26-09-1979
GB 1568220	A	29-05-1980	FR 2335401 A1	15-07-1977
			BE 849334 A1	01-04-1977
			CH 605279 A5	29-09-1978
			ES 454197 A1	01-12-1977
			IT 1065987 B	04-03-1985
FR 1337932	A	20-09-1963	NL 282526 A	
EP 0368116	A	16-05-1990	IT 1229323 B	08-08-1991
			IT 1227469 B	11-04-1991
			AT 84757 T	15-02-1993
			AU 622236 B2	02-04-1992
			AU 4455489 A	31-05-1990
			BR 8905725 A	05-06-1990
			CA 2002411 A1	08-05-1990
			DD 294223 A5	26-09-1991
			DE 68904526 D1	04-03-1993
			DE 68904526 T2	03-06-1993
			DK 107190 A	04-11-1990
			EP 0368116 A1	16-05-1990
			ES 2037371 T3	16-06-1993
			FI 90224 B	30-09-1993
			GR 3007200 T3	30-07-1993
			HU 55609 A2	28-06-1991
			IE 65522 B1	01-11-1995
			NO 901961 A	05-11-1990
			NZ 231274 A	25-09-1991
			PL 285038 A1	14-01-1991
			US 5731023 A	24-03-1998
			US 5737905 A	14-04-1998
US 3659393	A	02-05-1972	NONE	
FR 2815013	A	12-04-2002	FR 2815013 A1	12-04-2002
EP 1279600	A	29-01-2003	EP 1279600 A1	29-01-2003
US 3545175	A	08-12-1970	NONE	